


BECAUSE **VIEW** IS **IMPORTANT**



DOWERATM
systems

INSPIRING SOLUTIONS FOR ALUMINIUM SYSTEM WINDOWS, DOORS & FACADES

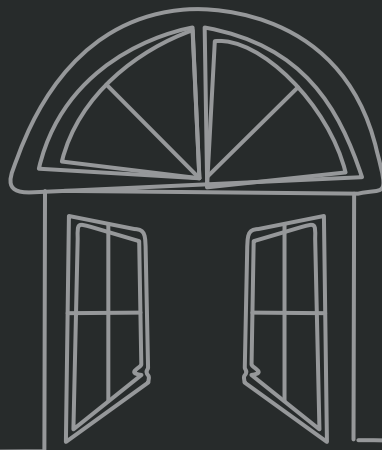

Dowera is the neighbourhood name you could thrust upon all your trust for your fenestration requirements. DoWera stands rock and solid in the market for about 12 years now and has proved a notable place. Like the name of our company suggests, DOWERA, it has brought in a new and revolutionising era for doors and windows that are the perfect blend of unique aesthetics, desired quality and out of the box novelty. Our able team has made sure that we proved the clients get the best most in efficiency and style. The company has quite literally opened the doors and windows for the availability of premier quality products.

Our wide range of products lie from Sliding window, Casement window, Swing doors, Bifold doors and Slimline Windows.

OUR MISSION

Our mission is to transform DoWera; from a local neighbourhood name into a global one. We aim to take our company to international level and shape it into a global brand that no fails to recognise. Our belief in our company's potential shall definitely make us fulfil our mission. Each window and door that we make that satisfies our clients' needs and brings a smile to their face is a step closer to our goal.

OUR VISION

The vision and intentions that we hold for the company is bright and boundless. DoWera believes in the aesthetic contentment and happiness of our clients, because for us, VIEW is IMPORTANT. Delivering the best in quality and design is our sole motto. Creating a space that fits in the vision of clients' is our vision and that we promise to do so with utmost conviction and dedication. The doors and windows we create are not merely furniture for us; they are pieces of our drive and labour.

ALUMINIUM SYSTEM WINDOWS, DOORS & FACADES






01 Sliding Window



Our production of Sliding window provides the ideal ease and deftness clients look for when they opt for this choice. It is an ideal choice for room facing walkway and balcony. The sliding system would ensure noiseless, dustfree, water resistant, smooth functionality and an exemplary choice of glamour for your space. Only the best of technology and machinery goes into the making of the effortless, solid and innovative sliders that is the perfect fit. Sliding windows would help your place gain the ultimate combination of style and comfort.

DOWERA™
systems


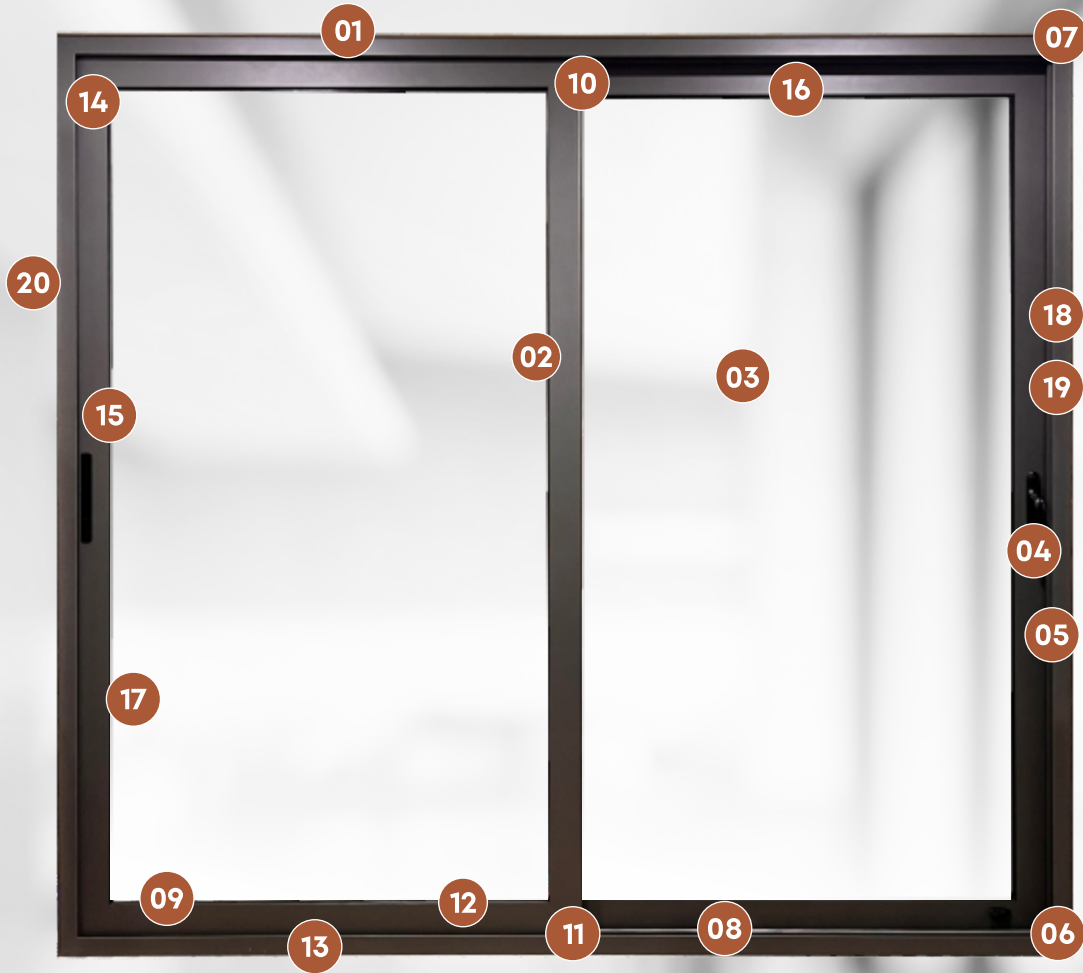


- | | | | |
|---------------------|-------------------------|----------------------------------|--------------------------|
| 01 Outer Frame | 06 Extruded Cleat | 11 Anti-dust Plug | 16 Vent Guide |
| 02 Sash | 07 45° Corner Joint | 12 'U' Groove Roller | 17 Micro Curing Gasket |
| 03 Selected Glass | 08 S.S. Track Rail | 13 Water Drainage Cap | 18 S.S. Screw |
| 04 Selected Lock | 09 Metal Bump Stopper | 14 Anti-Lift with Bump Stopper | 19 Screw Cap with Lock |
| 05 Frame Striker | 10 Interlock Cap | 15 Locking Strip | 20 Silicone Sealant |

Technical Specifications

PS-29


Aluminium Alloy	: 6063, T5, T6
Sash	: 29mm x 65mm
2 Track	: 78mm x 45mm
3 Track	: 104mm x 45mm
Roller Track	: SS.304 'U' type
Sash Width	: Max. 1500mm
Sash Height	: Max. 2900mm
Joinery	: 45° Corner plate
Glazing Type	: Single, Lami, DGU
Glazing Thickness	: 5mm to 20mm
Mesh	: Shutter / Retractable
Finish	: RAL finish , Wooden finish

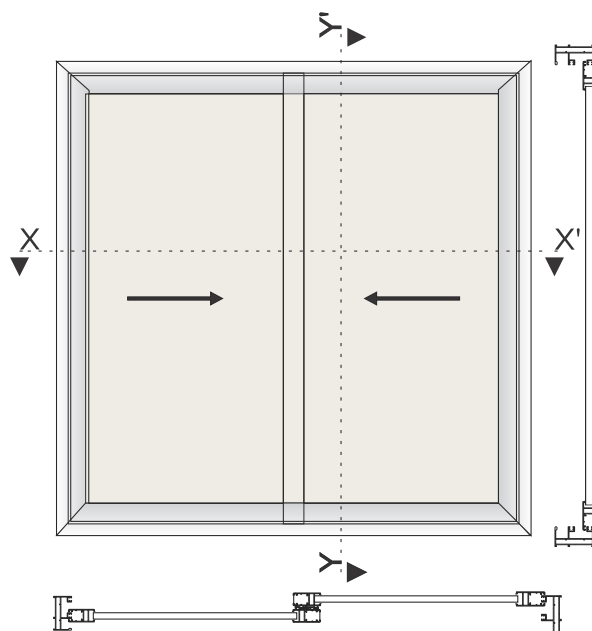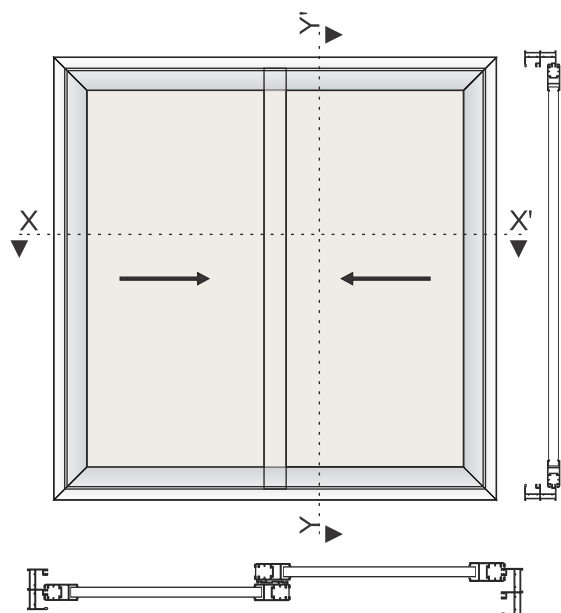

Technical Specifications

PS-35


Aluminium Alloy	: 6063, T5, T6
Sash	: 35mm x 75mm
2 Track	: 88mm x 45mm
3 Track	: 119mm x 45mm
Roller Track	: SS.304 'U' type
Sash Width	: Max. 1800mm
Sash Height	: Max. 3300mm
Joinery	: 45° Corner plate
Glazing Type	: Single, Lami, DGU
Glazing Thickness	: 5mm to 24mm
Mesh	: Shutter / Retractable
Finish	: RAL finish, Wooden finish

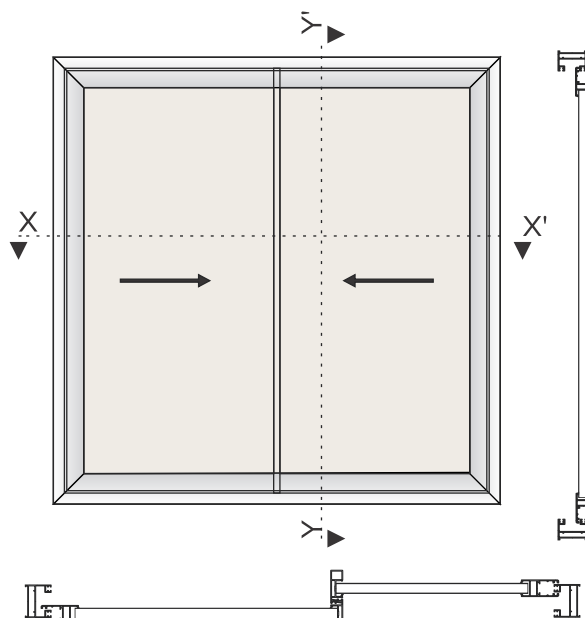

Technical Specifications

PS-20 Sleek

Aluminum alloy	: 6063, T5, T6
Sash	: 29mm x 65mm
2 Track	: 88mm x 45mm
3 Track	: 119mm x 45mm
Roller track	: SS. 304 'U' type
Sash Width	: Max. 1600mm
Sash Height	: Max. 3000mm
Joinery	: 45° /90°
Glazing Type	: Single, Lami, DGU
Glazing Thickness	: 6mm to 20mm
Mesh	: Retractable
Finish	: RAL finish, Wooden finish.
Interlock	: 20mm (visible) x 42mm
Reinforcement	: 20mm (visible) x 58mm

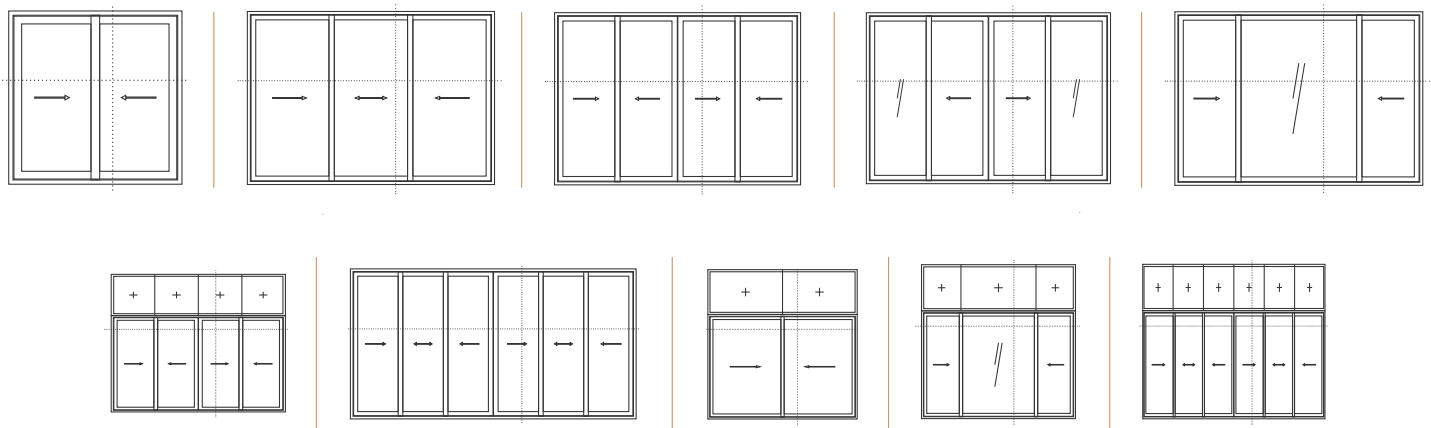

SLIDING **WINDOW**


Because **View** is Important



02 Casement Window

Our species of Casement windows is out-and-out a winner in terms of security and style. It verifies the optimum ventilation light and maintains temperature for your space. Also, it ticks mark the issue of weather resistance and durability. You can bid your worry of corrosion, a goodbye forever. Its frictionless mechanism ensures peaceful movement and motion.

DOWERA™
systems


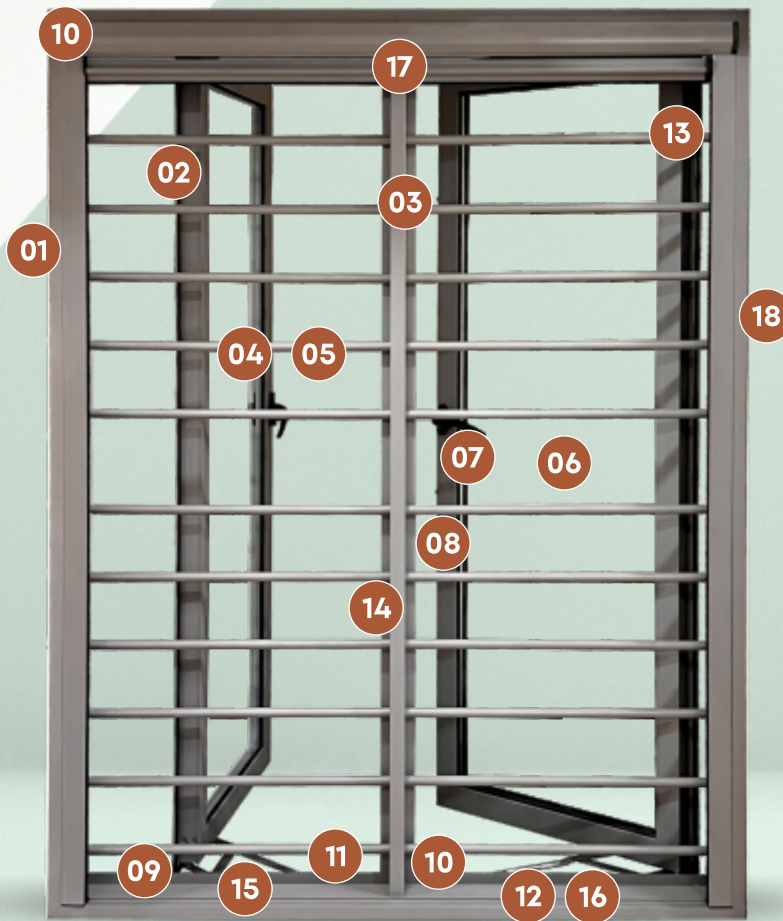


- | | | | |
|----------------------|--------------------------|--------------------------|--------------------------|
| 01 Outer Frame | 06 Selected Glass | 11 Water Drainage Cap | 16 Screw Cap with Lock |
| 02 Sash | 07 Selected Handle | 12 S.S. Friction Hinge | 17 Roll Down Mesh |
| 03 Transom Mullion | 08 S.S. Frame Striker | 13 Butt-Hinge | 18 Silicone Sealant |
| 04 Alu. Safety Bar | 09 Frame & Sash Gasket | 14 Espage Locking | |
| 05 Bright Bar | 10 Run-up Block | 15 S.S. Screw | |

Technical Specifications

PC-40


Sash	: 38mm X 65mm
Sash Style	: Pocket Type
Outer Frame	: 38mm X 42mm
Outer Combo Frame	: 111mm X 42mm
Sash Width	: Max. 650
Sash Height	: Max. 1800
Safety Grill	: Yes (With Combo Frame)
Locking	: Single Point, Multi Point, Espage.
Hinge	: Butt Hinge/ Friction Hinge
Joinery	: 45° Corner Cleat
Glazing Style	: Single
Glazing Thickness	: 5mm,6mm
Mesh	: Rolldown/ Retractable
Finish	: Ral Finish , Wooden Finish
Opening Style	: Side Hung/ Top Hung

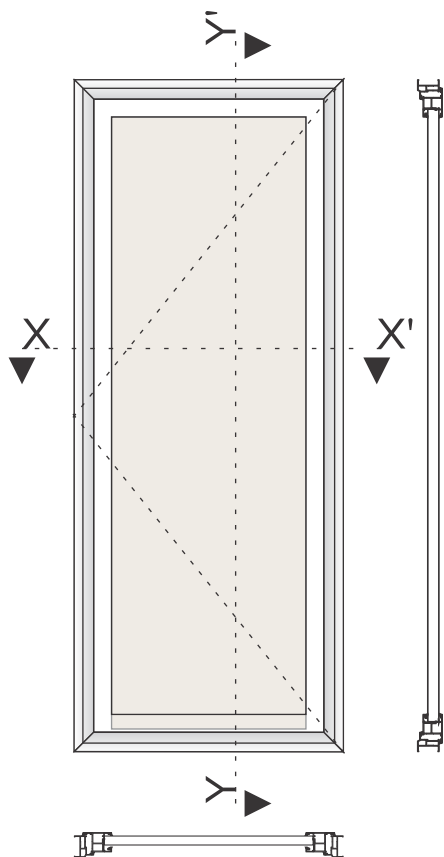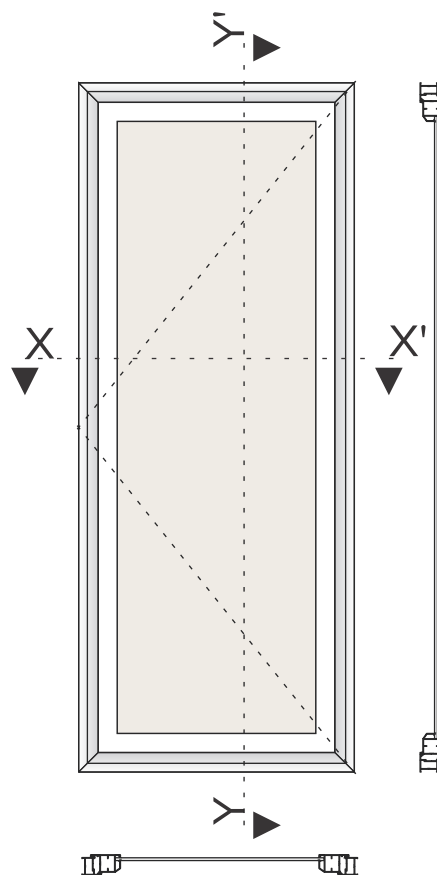

Technical Specifications

PC-50 HD

Sash	: 43mm X 65mm
Sash Style	: Glazing Bead
Outer Frame	: 48mm X 43mm
Outer Combo Frame	: 116 Mm X 43 Mm
Sash Width	: Max. 750mm
Sash Height	: Max. 2000mm
Safety Grill	: Yes (With Combo Frame)
Locking	: Single Point, Multi Point, Espage.
Hinge	: Butt Hinge/ Friction Hinge
Joinery	: 45° Corner Crimping
Glazing Type	: Single, DGU, Lami
Glazing Thickness	: 5mm To 24mm
Mesh	: Rolldown / Retractable
Finish	: Ral Finish , Wooden Finish
Opening Style	: Side Hung / Top Hung

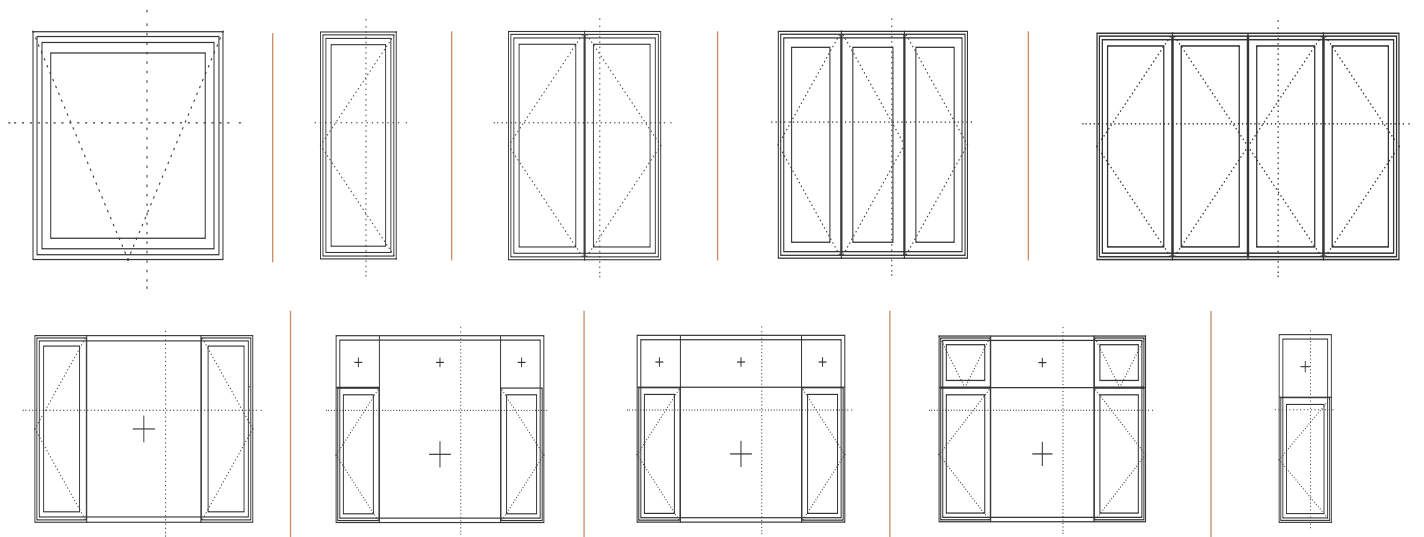

CASEMENT **WINDOW**

Because **View** is **Important**



03 Slimline windows

The light-weightiness and easy on eyes appearance of the slimline windows makes it the preferred choice for many of the clients. Its minimalism blended with strength gives it an edge over other options. It is well suited for wide open and heighted spaces. It is fabricated in such a way that it does justice to both charm and structure.


DOWERATM
s y s t e m s



Technical Specifications	PSSL-12	PSSL-34
Facing Width	15mm	17mm
Installation Flush to Floor Inside	Yes	Yes
Max Leaf Height	3 Meter	4 Meter
Max Leaf Width	2 Meter	No
Max Leaf Sq.Mtr	5 Sq.Mtr	8 Sq.Mtr
Glass Thickness	12mm	34mm
Max Leaf Weight	250 kg	350 kg
Locking	Shoot Bolt Two Point	Shoot Bolt Two Point
Frame Joinery	45° Corner Joint	45° Corner Joint
Sash Joinery	90° Corner Joint	90° Corner Joint



04 Bi-fold Doors



The versatility of the bi-fold doors distinctively offers flexibility and dexterity at the same time. It can prove to be an impeccable option for wide and open spaces like gardens or lawns that need a central getaway. It is highly insulated and safe that ensures the indoor protection of your place. Its high-end security does not compromise for the desired stylish and sophisticated look.


DOWERA™
systems

Technical Specifications


PSSF-70

Aluminium Alloy	: 6063, T6
Outer Frame	: 70 mm X 50 mm
Sash	: 70 mm X 60 mm
Door Height	: Max. 3000 mm
Door Width	: Multiple of Max 900 mm
Joinery	: 45° Corner Connector
Glazing Thickness	: 8 mm To 30 mm
Mesh	: Retractable
Locking	: 4 Point Locking And Shoot Bolt Locking


DOWERATM
systems




1+2




3+1




3+2




4+1




5+1




3+0




4+0



5+0



6+0



3+3

BI - FOLD **DOOR**

Because **View** is **Important**



05 Swing Door



The array of our swing door system offers the superb merging of swag and efficiency. It is securely hinged and meticulously glazed. It is the perfect choice for hallway and corridor passageways and positively pass for swiftness and handiness. The clients can choose from the spectrum of designs that acutely fit their aesthetic sense and elevate the overall look of the space. The opening and closing motion are as easy and smooth as it gets.

DOWERATM
systems

Technical Specifications

PCD-50

Sash	:	43mm x 87mm
Outer frame	:	48mm x 43mm
Outer frame combo	:	116mm x 43mm
Door width	:	Max. 1200mm
Door height	:	Max. 2700mm
Locking	:	Single/Multi/Mortise Key Lock
Hinge	:	Butt hinge
Joinery	:	45° Corner Crimping
Glazing type	:	Single/Lami/DGU
Glazing thickness	:	6mm to 24mm
Finish	:	Ral Finish, Wooden Finish
Opening	:	Side Hung

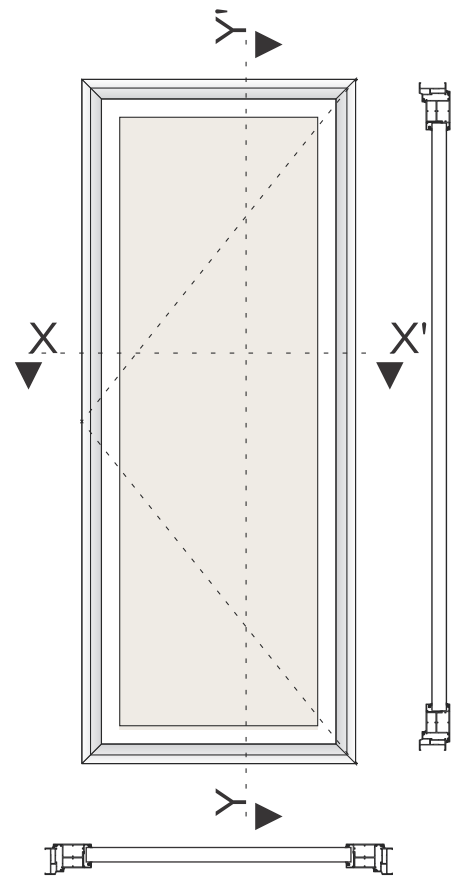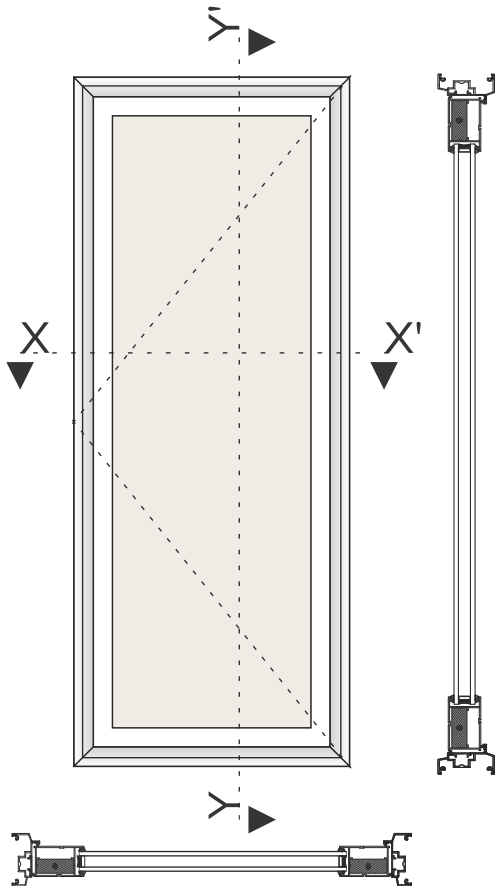

Technical Specifications

PCD-75

Sash Vertical	:	75mm X 45mm
Sash Top & Bottom	:	105mm X 45mm
Outer Frame	:	75mm X 51mm
Door Width	:	Max. 1200mm
Door Height	:	Max. 3000mm
Locking	:	Single/Multi/Mortise/ Biometric Lock
Hinge	:	Butt Hinge
Joinery	:	90° Mechanical Joint
Glazing Type	:	Single/Lami/DGU
Glazing Thickness	:	6mm To 24mm
Finish	:	Ral Finish, Wooden Finish
Opening	:	Side Hung












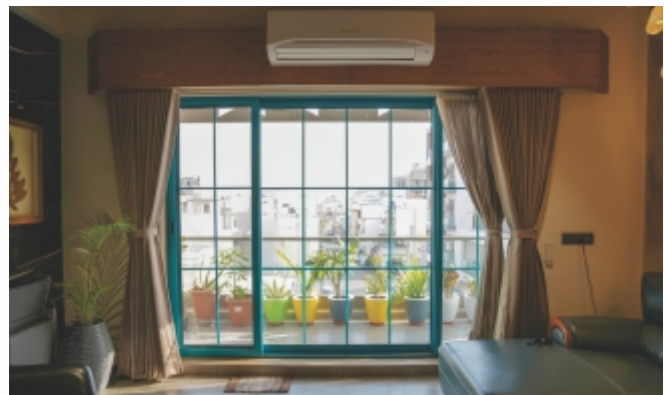



DOWERA™
systems

Window &
ALUMINIUM WINDOW &
DOOR SYSTEM **Doors**



Shree Pramukh Enterprise®

4-Mahadevwadi, Opp. Haveli, Laxmi Nagar Main Road,
Rajkot -360 004. Gujarat, INDIA

📞 97242 62062 / 93757 62062

✉ admin@dowerasystems.com

🌐 www.dowerasystems.com